

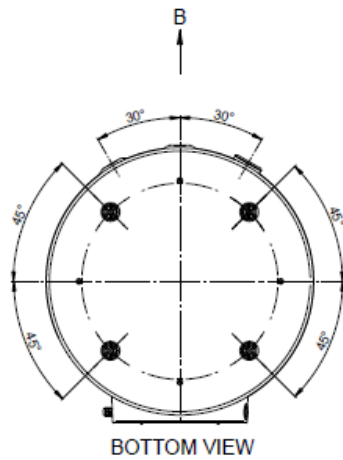


ECO KING



BOTTOM VIEW



TECHNICAL FEATURES	
- TANK IN AISI 316L STAINLESS STEEL	
- NOMINAL CAPACITY: 160 l	
- WELDING WITH "PLASMA" AND "TIG" TECHNOLOGY	
- MAX DOMESTIC WATER OPERATING PREASSURE: 1.0 MPa (10 bar)	
- MAX OPERATING TEMPERATURE: 95°C	
- INSULATION LAYER: POLYURETHANE CFC AND HCFC FREE DIRECT FOAMING, THICKNESS > 50 mm	
- EXTERNAL COATING: COLOURED - BLACK - PLASTIC (PVC) THICKNESS 0,35 mm	
TEST	
- AIR PRESSURE TANK TEST: UNDER 6 bar THROUGH WATER IMMERSION TO VERIFY EVENTUAL COMPONENTS LEAKING (100%)	

<table border="1"> <tr> <td>Model</td> <td>15</td> </tr> <tr> <td>Material</td> <td>A1</td> </tr> <tr> <td>Surface Treatment</td> <td>15</td> </tr> <tr> <td>Pressure</td> <td>0.0200</td> </tr> </table>		Model	15	Material	A1	Surface Treatment	15	Pressure	0.0200	15-04-2016 Alcantara S.p.A. Via Salaria 1000, 00198 Roma, Italy Tel. +39 06 4789 1111 Fax +39 06 4789 1112 Email: info@alcantara.com	IN LAVORO SC 176690 A 00 Page 1/2
Model	15										
Material	A1										
Surface Treatment	15										
Pressure	0.0200										

15-04-2016 Alcantara S.p.A. Via Salaria 1000, 00198 Roma, Italy Tel. +39 06 4789 1111 Fax +39 06 4789 1112 Email: info@alcantara.com	
---	--